


SM-S2 (R-3)

SM-S2 (R-3) is designed for compactors applications. It delivers high impact resistance when used in paving applications. Thanks to its strong carcass structure it offers longevity.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi/bar)	LOAD CAPACITY PER TIRE (KG)	
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)	
													40	50
23.1-26	10	TT	158	A8	DW20	-	1580	587	708	4582	27	25	4250	3870
23.1-26	12	TL	162	A8	DW20	-	1580	587	708	4582	27	28	4750	4325
23.1-26	14	TL	166	A8	DW20	-	1580	587	708	4582	27	28	5300	4825

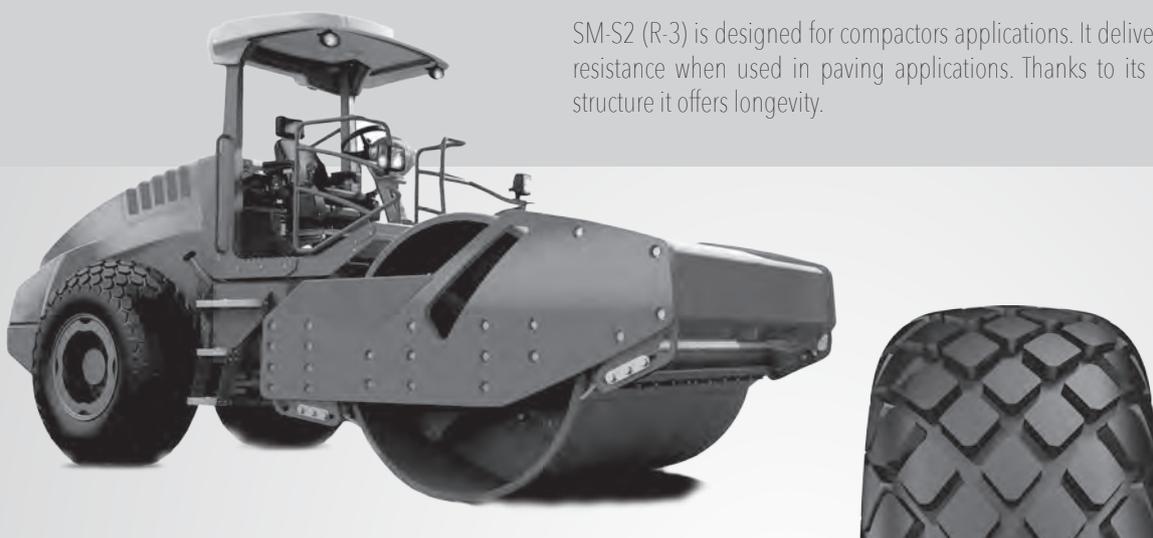