

COMPACT



LINE

MICHELIN POWER CL

# WORKSITE DAMAGE, THE RIGHT TYRE CHANGES EVERYTHING!



Robustness and stability



Telescopic



Backhoe loaders



Mini Loaders




# Characteristics of MICHELIN Power CL Compact Line cross-ply tyres

Ø Inches	Description	CAI	Tyre Characteristics				Rim profile <sup>(1)</sup>	Tube <sup>(2)</sup>	75% internal volume	
			S mm	D mm	R' mm	C.d.R. mm	Inches	litres		
18	280/80 -18 132A8 IND TL POWER CL (10,5/80 -18) Equiv 10PR	281778	288	902	413	2691	9 W8, W9, 10, W10	438	80	
	340/80 -18 143A8 IND TL POWER CL (12,5/80 -18) Equiv 12PR	610873	353	1006	452	2988	11 10, W10, W11, 12, 11SDC, 12SDC	828	99	
20	280/80 -20 133A8 IND TL POWER CL (10,5/80 -20) Equiv 10PR	694767	287	947	435	2828	9 W8, W9, W10, 10	542	86	
	340/80 -20 144A8 IND TL POWER CL (12,5/80 -20) Equiv 12PR	495503	337	1045	474	3112	11 12, W10, W11, 11SDC, 12SDC, 10	664	135	
	400/70 -20 149A8 IND TL (16,0/70 -20 & 405/70 -20) Equiv 16PR	346809	405	1065	480	3167	13 14, 12, 12SDC, 13SDC	664	129	
24	400/70 -24 158A8 IND TL POWER CL (16,0/70 -24 & 405/70 -24) Equiv 20 PR	407878	418	1173	535	3473	DW13 14, DW14L, TW14L, 13	664	216	
	<b>NEW</b> 460/70 R 24 159A8 IND TL POWER CL (17.5 - 24 ) Equiv 18PR	474764	457	1241	557	3687	DW15L DW14L, DW16L, 16, 14		217	
	<b>NEW</b> 500/70 R 24 164A8 IND TL POWER CL (19.5 - 24 ) Equiv 20PR	196220	504	1315	588	3903	DW16L DW15L, 16		264	
	400/80 -24 156A8 IND TL POWER CL (15,5/80 -24) Equiv 16 PR	215398	414	1257	572	3746	DW13 DW14L, 13, 14, TW14L	703	202	
	400/80 -24 162A8 IND TL POWER CL (15,5/80 -24) Equiv 20 PR	050267	414	1257	571	3743	DW13 DW14L, 13, 14	703	202	
	440/80 -24 168A8 IND TL POWER CL (17,0/80 -24 & 16,5/85 -24) Equiv 22PR	165629	460	1328	596	3944	DW15L DW14L,DW13, 14, TW14L	710	235	
	480/80 -26 160A8 IND TL POWER CL (18,4 -26) Equiv 14PR	755683	495	1438	646	4272	DW16L DW15L	716	303	
28	440/80 -28 156A8 IND TL POWER CL (16,9 & 16,5/85 -28) Equiv 14PR	580712	445	1415	643	4215	DW15L DW14L, DW13	822	260	
30	420/80 -30 155A8 IND TL POWER CL (16,9 -30) Equiv 14PR	577845	432	1432	656	4296	DW15L DW14L, DW13	754	244	





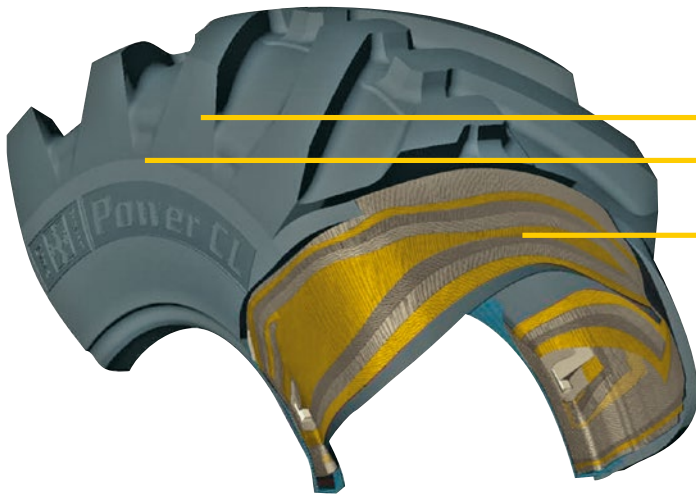


- Tread pattern and type of rubber compound
- Sidewall protection rubber
- Casing architecture

## ■ Robustness and stability

- Resistance to impacts and punctures:
  - Type and number of casing plies
  - Thickness of protection rubber
- Resistance to tearing and chunking:
  - Tread pattern and type of rubber compound

## ■ Stability in all conditions

- Sidewall rigidity for vertical and lateral stability due to the number and angle of casing plies

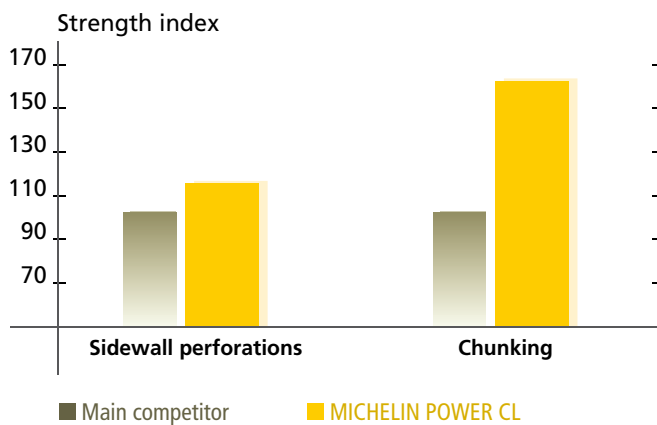

Source: MICHELIN test and research centre (Ladoux)

## ■ Quality at a competitive price

- Cross-ply construction
- Michelin rubber compound

### Sizes

280/80 - 18 TL 132A8  
 340/80 - 18 TL 143A8  
 280/80 - 20 TL 133A8  
 340/80 - 20 TL 144A8

400/70 - 20 TL 149A8  
 400/70 - 24 TL 158A8  
 400/80 - 24 TL 156A8  
 400/80 - 24 TL 162A8

440/80 - 24 TL 168A8  
 480/80 - 26 TL 160A8  
 440/80 - 28 TL 156A8  
 420/80 - 30 TL 155A8

